

Designed specifically for heavy-duty commercial applications. Fully modulating, gas-fired, tankless, water heaters with sealed combustion (optional) and power vented flue. Can be installed either indoors or outdoors. Capable of supplying hot water for domestic hot water systems (directly or indirectly) and can be used with water storage tanks, recirculation systems, and/or combined domestic & heating applications.

FEATURES:

PRIMARY HEAT EXCHANGER IS CONSTRUCTED OF COMMERCIAL-GRADE COPPER

- Stronger than standard copper and more resilient against erosion.
- Copper provides 25x better heat transfer than stainless steel thus stabilizing outgoing water temperature quicker and reducing pressure drop across the heat exchanger.

CONTINUOUS MAXIMUM FLOW RATES UP TO 14.5 GPM

EASY-LINK UP TO 4 UNITS

- Multi Link up to 10 units with TM-MC01 multi unit controller

COMBINED INDOOR/OUTDOOR MODELS

AVAILABLE IN NATURAL GAS OR PROPANE (LP)

ASME MODELS AVAILABLE

LOW NOX EMISSIONS

COMPLIES WITH LEAD FREE STANDARDS

SAFETY FEATURES:

- Built-in Freeze Protection
- Manual Reset Hi Limit (Up to 194°F)
- Overheat Cutoff Fuse
- Inlet and Outlet Thermistors for Constant Temperature Monitoring
- Air Fuel Ratio Rod
- GFI, Fuse & Surge Absorber
- Flame Sensor

VENTING AND COMBUSTION

- 5" Category III Stainless Steel
- Vertical or Horizontal Installation
- 50' Max Length, 5 elbows max (90° elbows = 5' equivalent length)
- Power Vent
- Electronic Ignition - No Pilot Light
- 5" Combustion Air Intake (with optional kit)

OPTIONAL ACCESSORIES

- Multi-Unit Controller
- Remote Temperature Controller
- Direct Vent Conversion Kit
- Pipe Cover
- Vent Cap
- Backflow Preventor

WARRANTY

- 6-Year Limited Warranty on Heat Exchanger in Commercial Applications/5-Year Parts Warranty*



GT-910-NIE
GT-910-PIE
AGT-910-NIE
AGT-910-PIE

ANSI Z21.10.3

CSA 4.3



HLW
 For supplying
 potable hot water
 ASME model ONLY



Heavy-Duty Commercial Gas Tankless Water Heaters

Model Number*	Type	Gas Consumption Input		Thermal Efficiency	INLET GAS PRESSURE		GPM**	DIMENSIONS IN INCHES		
		Minimum BTU/H	Maximum BTU/H		Min. In. W.C.	Max. In. W.C.		HEIGHT	WIDTH	DEPTH
GT-910-NIE	Natural	15,000	380,000	80%	4.0	10.5	0.5 - 14.5	25-1/4	24-7/8	12-3/4
GT-910-PIE	Propane	15,000	380,000	82%	8.0	14.0	0.5 - 14.5	25-1/4	24-7/8	12-3/4
AGT-910-NIE*	Natural	15,000	380,000	80%	4.0	10.5	0.5 - 14.5	25-1/4	24-7/8	12-3/4
AGT-910-PIE*	Propane	15,000	380,000	82%	8.0	14.0	0.5 - 14.5	25-1/4	24-7/8	12-3/4

Model Number*	VOLT	AMP	FLUE***	INTAKE (OPTIONAL)	HOT/COLD GAS CONN.	Approx. Shipping Weight (lbs)
GT-910-NIE	120	1.48	113	5" O.D.	1" NPT	113
GT-910-PIE	120	1.48	113	5" O.D.	1" NPT	113
AGT-910-NIE*	120	1.48	113	5" O.D.	1" NPT	113
AGT-910-PIE*	120	1.48	113	5" O.D.	1" NPT	113




All dimensions in inches.

* ASME models

**Current numbers based on factory testing, 0.4 GPM required for continuous fire after initial ignition.

***Category III required

15 - 150 psi water pressure. Pressure only relief valve requires (Min. 380,000 BTUs. 150 PSI). Min 40 PSI or above recommended for maximum flow.

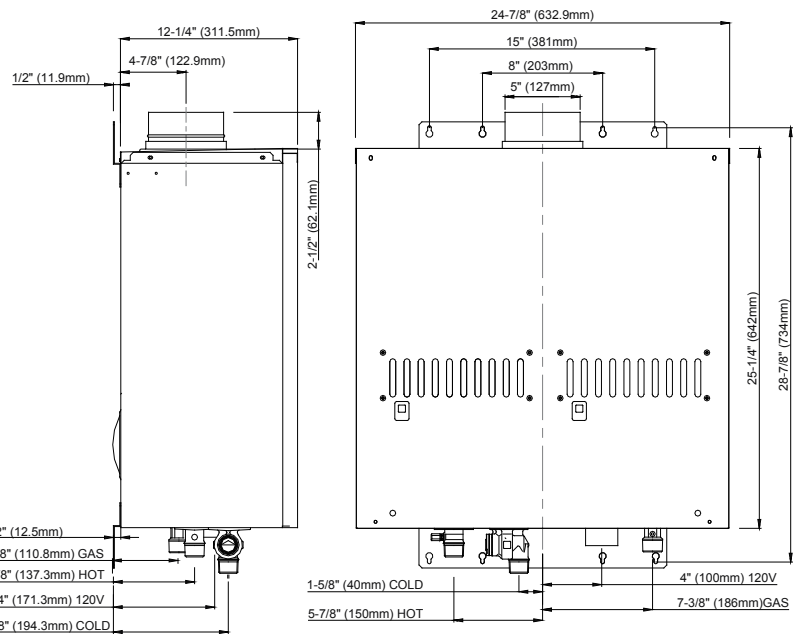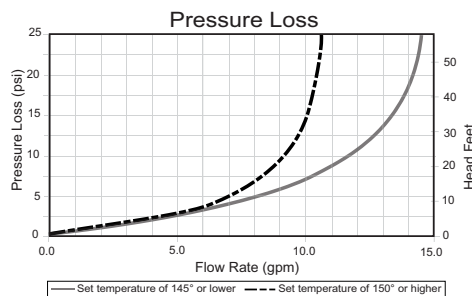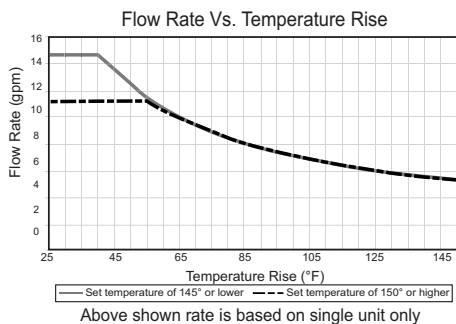

SPECIFICATION

Water heater(s) shall be Model _____ as manufactured by American Water Heaters. The water heater(s) shall be a copper coil integral fin and tube construction with quick release brass or bronze waterways. Heater(s) will be factory assembled and tested. The heater shall be vented with 4" Stainless steel Category III vent pipe a distance not to exceed 50' (equivalent) feet terminating vertically or horizontally as prescribed. Intake air with optional direct vent kit may be of such materials as PVC not to exceed a total of 50' (equivalent). The heater(s) shall be controlled by on board solid state printed circuit board monitoring incoming and outgoing temperatures with factory-installed thermistors, sensing and controlling flow rate to set point temperature with control both air and gas mixture inputs to maintain thermal combustion efficiency. Unit also consists of ground fault interrupter, inline fusing, spark ignition and sensor system, aluminized stainless steel burners, air-fuel ratio rod, Hi limit switch, modulating and proportional gas valves, freeze protection sensor and heating block and overhead cutoff fuses. The water heater(s) shall be CSA listed and meet the energy efficiency requirements of ASHRAE 90.1b-1992.

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.