

## PROLINE® XE POWER VENT

### VERSATILE POWER VENT DESIGN

- All models feature an exclusive 3-position rotatable blower outlet which adds flexibility.
- Combined horizontal and vertical vent runs up to 180 equivalent feet with 4" diameter venting (ABS, PVC, CPVC and polypropylene).
- All models are equipped with a protected sensor that detects the presence of flammable vapors and automatically disables the burner to prevent ignition.
- Air intake snorkel elevates the inlet location of combustion air to prevent flammable vapors from entering the sealed combustion chamber.
- Reduced NOx emissions comply with air quality management district regulations.
- Built-in heat traps on the water inlet and outlet reduce the amount of heat lost through piping.
- "Environmentally-Friendly" foam insulation reduces the amount of heat loss and contributes to overall energy efficiency.

### DYNACLEAN™ DIFFUSER DIP TUBE

- Reduces lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

### HOT-SURFACE IGNITOR

- More robust and reliable than standing pilot, and reduces energy consumption.

### BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

### USER-FRIENDLY

- State-of-the-art electronic gas control provides more precise temperature control.
- LED control light displays operation status and diagnostics information

### ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

### AVAILABLE IN NATURAL GAS AND PROPANE

### DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 150 psi working pressure.
- Certified to ANSI Z21.10.1 - CSA 4.1 or ANSI A21.10.3 - CSA 4.3 standards governing storage tank-type water heaters

### 6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to [americanwaterheater.com](http://americanwaterheater.com).



Model Number	Series	Nominal Capacity	Rated Storage Volume	UEF	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Gallon Per Hour	First Hour Rating (Gallons)	Dimensions in Inches								Approx. Shipping Weight (lbs)
								A	B	C	D	E	F	G	H	
PVG62-40S40-NVS	200	40	38	0.67	45	40,000	73	59	49-5/8	22	29-1/8	11	13-1/4	42-1/2	N/A	174
PVG62-40T50-NVS	200	40	38	0.70	56	50,000	87	68-1/2	59-1/4	20	27-1/8	11	13-1/4	53-1/8	15-1/4	176
PVG62-50S40-NVS	200	50	49	0.72	45	40,000	79	60-1/8	50-3/4	24	31-1/8	11	13-1/4	43-3/4	N/A	198
PVG62-50T50-NVS	200	50	48	0.72	56	50,000	97	68-1/8	58-3/4	22	29-1/8	11	13-1/4	51-3/4	15-1/4	192
PVG62-50S62-NVS	200	50	50	0.73	69	62,000	119	61-1/8	52	24	31-1/8	11	13-1/4	44-1/2	15-1/4	212
PVG62-75T76-NV	310	75	72	0.69	80	76,000	116	70-5/8	61-1/4	26	33-1/8	11	13-1/4	53	15-1/4	277

No option available for top T&P.

Models PVG62-50S62-NVS and PVG62-75T76-NV come from the factory standard with side loop fittings.


Natural gas models cited are series 200/210. Propane models are series 201/211. For propane models, change "N" to "L" in model number.

All models certified from sea level to 10,100 ft.



Optional side loop fittings are available on 50,000 Btu input models, add "L" to the suffix (example: PVG 62-50T50-NVSL).

## VENT LENGTH

Model Number	Maximum Vent Length Eq. ft.		
	2"	3"	4"
PVG62-40S40-NVS	50'	125'	180'
PVG62-40T50-NVS	50'	125'	180'
PVG62-50S40-NVS	50'	125'	180'
PVG62-50T50-NVS	50'	125'	180'
PVG62-50S62-NVS	N/A	50'	125'
PVG62-75T76-NV	N/A	50'	125'



## Three Position Rotatable Blower

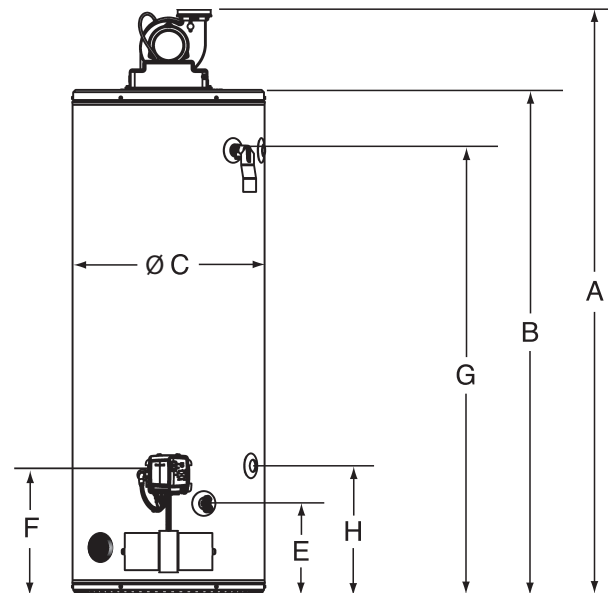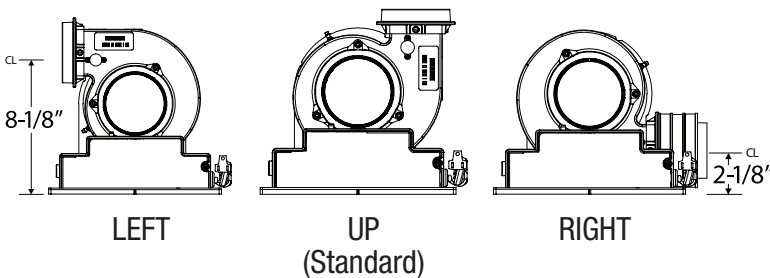

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.