

10-Year Limited Tank/1-Year Limited Parts Warranty*

The Polaris has a high grade 444 stainless steel tank with brass connections for years of dependable, trouble-free service - no anode required. A submerged combustion chamber with spiral flue provides up to 96% thermal efficiency and ultra-low standby heat loss of approximately 1%.

POLARIS®



- **Sealed Combustion with Woven Fiber Premix Burner**
Metal fiber burner is designed for clean combustion in high-intensity blue flame mode. Manufactured of refractory steel that resists corrosion. Excellent resistance to thermal and mechanical shock, even at extreme temperatures. Uniform combustion provides excellent heat transfer. Meets Low NOx requirements for California and Texas.
- **Whisper Quiet Operation**
Ultra quiet blower and burner minimize noise. Requires 120 volt 60Hz power supply. Draws less than 5 Amps.
- **Power/Direct Vent Using 2" or 3" Plastic Pipe**
Direct vents up to 120' using PVC, CPVC, or ABS pipe either Thru-the-Wall or Thru-the-Roof. Optional concentric vent kit available for use Thru-the-Roof or Wall.
- **"Plug-and-Play" Technology**
No special adjustments are required at initial start up. Connect air inlet, exhaust outlet, water, electricity, and gas, set the temperature and the system functions properly.
- **Self-Diagnostic Control System**
Three external LED lights indicate operational status of water heater. Microprocessor monitors nine critical functions. An LED troubleshooting light, visible through view port, signals heater operation status.
- **Full Serviceability from the Front**
Removal of two front-located access panels exposes all serviceable components. Modular components are easily removed.
- **Other Features**
 - Thermistor Temperature Sensor
 - 24-Volt Thermostat Control
 - Hot Surface Ignition
 - Full Flow Brass Drain Valve
 - Zero Clearance to Combustibles
 - CSA Certified and ASME Rated T&P Relief Valve
 - Factory Provided Condensate Trap
 - Multiple 1" Brass Tank Connections
 - Factory Provided Tempering Valve
- ***Certified to ANSI Z21.10.3-CSA 4.3 standards and meets or exceeds ASHRAE/IESNA 90.1-current edition.**



*For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (800) 456-9805.

Up to 96% Efficient

1. The quiet, brushless DC blower prepurges the submerged combustion chamber for 8 seconds and turns off.
2. The hot surface ignitor is energized and glows red hot.
3. The blower turns on, precisely mixing air and gas for combustion. The mixture is forced through the metal fiber burner and is ignited by the hot surface ignitor. A blue flame is evenly distributed across the entire burner, resulting in clean combustion with low nitrous oxide emissions.
4. The combustion chamber wall transfers high temperature heat from the flame to the water.
5. The blower pushes hot combustion gases through the spiral coil, which scrubs the remaining heat from the hot gases.
6. As combustion gas exits the bottom of the spiral coil, it is barely warm to the touch. Up to 96% of the heat from the flame is transferred to the water.
7. Combustion gases are vented through PVC, CPC or ABS plastic pipe.
8. Condensation formed by cooled combustion air is captured by a condensate trap and drained through a drain line.



The Quiet Way to Efficiently Heat Water

An ultra quiet radial blower is combined with a submerged burner for whisper quiet operation. Indicator lights illuminate when the power is on and when the ignitor and burner are operating.



An Excellent Choice for Hot Water

Polaris is ideal for large homes. For dishwashing, showers, baths, clothes washing, or hot tubs, Polaris is an excellent choice. Polaris models heat up to 255 GPH at a 90°F temperature rise, compared to 41 GPH for standard gas water heaters.



Polaris Combines Water Heating with Space Heating



Forced Air Hydronic Heat

Polaris can be used to combine an air handler for comfortable forced air hydronic space heating with potable hot water. Hot water is circulated through a coil in the air handler. Air from the home is warmed as it is blown across the coil. Warmed air is returned to the home through air ducts. With up to 199,000 BTUs, Polaris can heat most homes, large or small.


Radiant Hydronic Heat

Polaris works great for homeowners who prefer radiant hydronic heat. With radiant floor hydronic systems, potable hot water is circulated through tubes under the floor. The floor absorbs heat from the tubes and radiates it into the room. With radiant baseboard heat, potable hot water is circulated through finned tube baseboards. Heat rises from the baseboard heaters, warming the home. All water components must be approved for use with potable water.





Polaris® High-Efficiency Residential Gas Water Heater

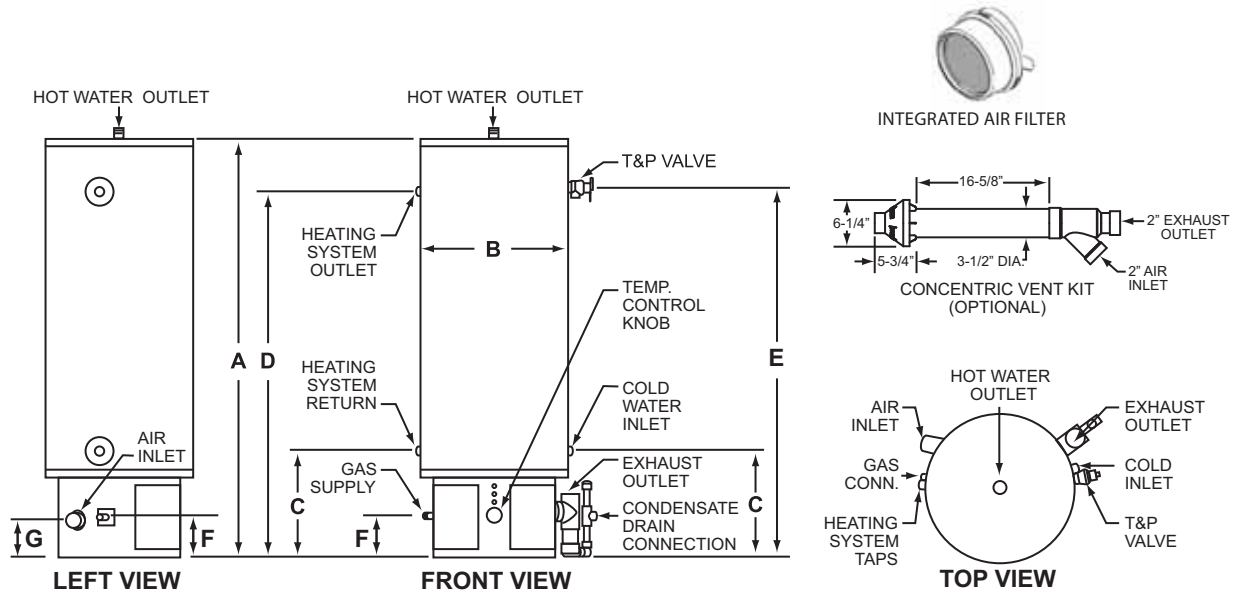

MODEL NUMBER	GAL CAP.	INPUT BTU PER HR.	THERMAL EFFICIENCY	GPH RECOVERY 90° RISE	EXTERIOR		VENT DIAMETER	1" WATER CONNECTIONS		T&P HEIGHT E	GAS SUPPLY* F	APPROX. SHIP WEIGHT
					A	B		C	D			
PG10 34-100-2NV	34	100,000	96	129	48-1/2	22	2 or 3	15-3/4	40-1/2	41	6-1/8	150
PG10 34-130-2NV	34	130,000	96	168	48-1/2	22	2 or 3	15-3/4	40-1/2	41	6-1/8	150
PG10 34-150-2NV	34	150,000	95	192	48-1/2	22	2 or 3	15-3/4	40-1/2	41	6-1/8	150
PG10 50-130-2NV	50	130,000	95	166	62-1/2	22	2 or 3	15-3/4	54-1/2	55	6-1/8	176
PG10 50-150-2NV	50	150,000	95	192	62-1/2	22	2 or 3	15-3/4	54-1/2	55	6-1/8	176
PG10 50-175-3NV	50	175,000	96	226	63-3/4	22	3	15-3/4	55-3/4	56-1/4	6-1/8	180
PG10 50-199-3NV	50	199,000	96	257	63-3/4	22	3	15-3/4	55-3/4	56-1/4	6-1/8	180

For propane, substitute "P" for "N" in the model number. 3" Concentric Vent Part #6911089 or 2" Concentric Vent Part #6911088. Specifications are subject to change without notice in accordance with our policy of continuous improvement. Input, output and recovery may vary depending upon air inlet and exhaust outlet installations. Length and number of bends in inlet and outlet pipes may reduce input and output. Consult installation, operation and service manual for details. Dimensions on all charts shown in inches. *1/2" gas supply line can be used for up to 150,000 BTU units, units over 150,000 BTUs require a 3/4" gas supply line.

Specification

Residential gas-fired water heater(s) shall be a direct/power vent Polaris model _____ as manufactured by American Water Heaters and shall have a 10-year limited tank warranty and a 1-year limited parts warranty, as outlined in the written warranty. Units shall be designed to burn _____ (natural/propane) gas and be CSA International certified to the latest edition of ANSI Z21.10.3 - 4.3 CSA Standards. Water heater(s) shall have a normal storage capacity of _____ gallons and a recovery rate of _____ GPH @ 90° F rise with a rated input of _____ BTU/Hr. Water heater(s) shall be condensing type with a minimum thermal efficiency of 95-96%, power vented with PVC, ABS, or CPVC pipe. Water heater(s) shall have combined vent capabilities of up to 120' to the exhaust outlet with up to 120' to the air inlet. Water heater(s) shall have a low noise combustion system with a woven fiber steel burner capable of low NOx (less than 40 ng/j) in the blue flame mode and shall be manufactured of _____ of refractory steel, resistant to thermal and mechanical shock. The gas valve shall be a Honeywell CV1-r1 series gas valve with a matching 45,900 series venturi manifold using a 1:1 air/gas ratio. The combustion system shall be factory adjusted and require no field adjustment on startup. The tank shall be constructed of 444 stainless steel with a submerged combustion chamber and rated for 150 PSI working pressure and 300 PSI test pressure. The tank shall be surrounded by two inches of non-CFC foam insulation covered by an enamel coated metal jacket. Operating controls shall have a 24-volt integrated control circuit, an immersed thermistor temperature sensor, a recycling energy cut-off switch, external temperature adjustment, and shall have LED lights that continuously indicate the operational status of the water heater(s). A microprocessor shall automatically monitor nine critical operating functions and signal the status of each. A factory installed temperature and pressure relief valve shall be provided on all models. A factory provided water thermostatic tempering valve shall be provided with all models.

Distributed By:

Order Entry and Sales

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 4808 (Mailing)
 Johnson City, TN 37602-4808
 (800) 937-1037
 FAX (800) 581-7224

Warranty and Service

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 1597 (Mailing)
 Johnson City, TN 37605-1597
 (800) 456-9805
 FAX (800) 999-5210

NRGS00908 August 2010R