

Tankless High Efficiency Condensing Outdoor Models

**12-Year Limited Warranty on Heat Exchanger Residential/5-Year Light Commercial
5-Year Parts Warranty***

FEATURES

- **Condensing Technology Provides Significant Energy Cost Savings**
- **Primary Heat Exchanger is Constructed of HRS35 Commercial-Grade Copper**
Stronger than standard copper and more resilient against erosion
- **Secondary Heat Exchanger is Made of Type 316L Stainless Steel** - Provides additional protection against corrosion
- **Continuous Maximum Flow Rates up to 9.0 GPM**
- **Can be Used for Both Residential and Light Commercial Applications**
- **ENERGY STAR® Qualified**
- **Easy-Link Up to 4 Units** - With no additional parts or accessories needed
- **Electronic Ignition - No Pilot Light**
- **Built-In Display Shows Operating Temperature Along with Diagnostic and Error Codes**
- **Low NOx Emissions**
- **Complies with Lead Plumbing Law**
- **Outdoor Models include Remote Control as a standard feature**
- **Indoor Models include both a Remote Control and Power Cord as standard features**
- **Safety Features:**
 - Air-Fuel Ratio (AFR) Sensor
 - Exhaust & Water Temperature Safety Control
 - Overheat Cutoff Fuse
- **Internal Freeze Protection System**
- **Accessories**
 - Remote Temperature Controller
 - Pipe Cover
 - Neutralizer Kit
 - Plumbing Installation Kits



**GT-520-NEH
GT-520-PEH**



ANSI Z21.10.3

CSA 4.3


**For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (877) 737-2840.*

Tankless High Efficiency Condensing Outdoor Models


| MODEL NUMBER | FUEL TYPE | GAS CONSUMPTION INPUT | | INLET GAS PRESSURE | | ENERGY FACTOR | HOT/COLD GAS CONN. | DIMENSIONS IN INCHES | | | APPROX. SHIPPING WEIGHT (LBS) |
|--------------|-----------|-----------------------|---------------|--------------------|--------------|---------------|--------------------|----------------------|--------|--------|-------------------------------|
| | | MINIMUM BTU/H | MAXIMUM BTU/H | MINIMUM W.C. | MAXIMUM W.C. | | | HEIGHT | WIDTH | DEPTH | |
| GT-520-NEH | Natural | 13,000 | 199,000 | 5.0 | 10.5 | 0.91 | 3/4" NPT | 25-3/5 | 18-1/2 | 12-2/5 | 73 |
| GT-520-PEH | Propane | 13,000 | 199,000 | 8.0 | 14.0 | 0.91 | 3/4" NPT | 25-3/5 | 18-1/2 | 12-2/5 | 70 |

All Dimensions in Inches.

15-150 psi Water Pressure. 40 psi or above recommended for maximum flow.

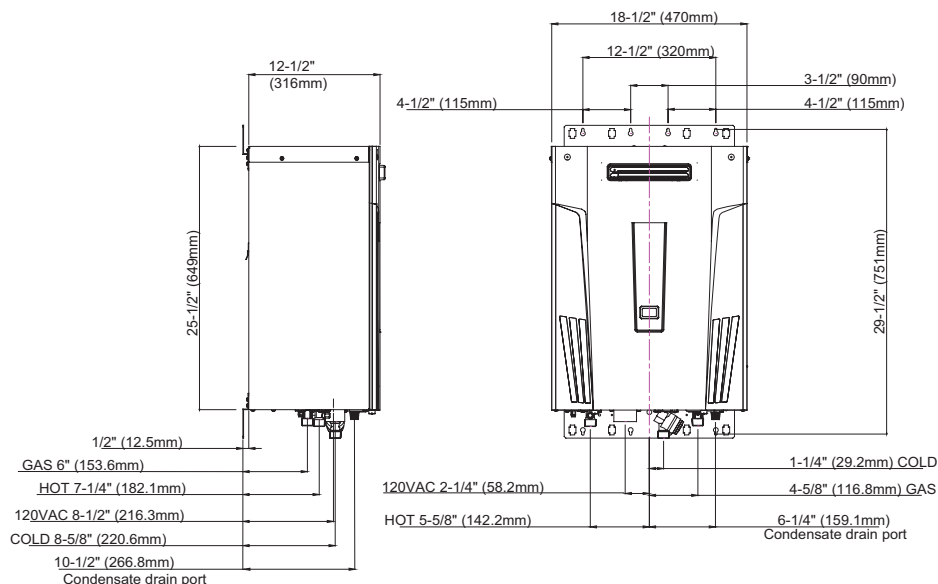

CLEARANCES: Top: 36"; Bottom: 12"; Front: 24"; Back: .05"; Sides: 3"

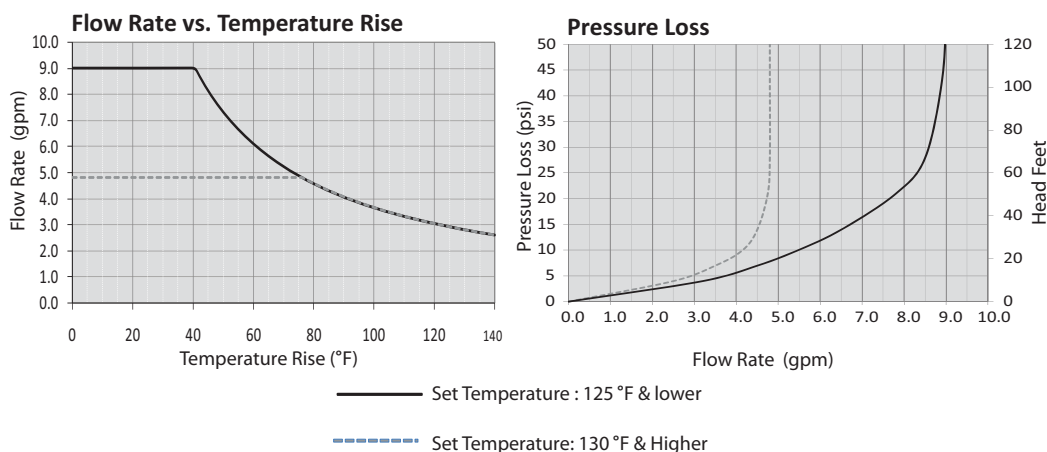

Distributed By:

Order Entry and Sales

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 4808 (Mailing)
 Johnson City, TN 37602-4808
 (800) 937-1037
 FAX (800) 581-7224

Warranty and Service

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 1597 (Mailing)
 Johnson City, TN 37605-1597
 (877) 737-2840