

HYBRID ELECTRIC HEAT PUMP

The Hybrid Electric heat pump water heater from American is the most cost effective energy-efficient option available for consumers who want to save money on their utility bills. The Hybrid Electric heat pump can reduce water heating costs up to 73% and provide payback in 2-3 years. With annual savings of \$306 or more, there is no better way to go green.

HOW DO THEY WORK?

- Absorb ambient heat from the surrounding air to heat water using a compressor and environmentally-friendly R134a refrigerant
- Self-contained heat pump unit is integrated into the top of the tank
- Multiple operating modes to maximize efficiency and performance

**QUALIFIES FOR MANY STATE AND LOCAL UTILITY REBATES -
CHECK WWW.DSIREUSA.ORG**

INCREASED ENERGY EFFICIENCY

- Improved efficiency designed in, to ensure available hot water at the lowest possible cost
- Up to a 3.45 Uniform Energy Factor (UEF) Rating conserves energy and meets ENERGY STAR® qualifications

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions
- Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting backup heating elements help heat water according to environmental conditions, demand, and the chosen operating modes

DRY FIRE PROTECTION

- Control system checks to ensure the tank is full of water during start up to prevent dry firing the heating elements

OPTIONAL AIR DUCT ADAPTER KIT

- Permits installation in confined spaces

COREGARD™ ANODE ROD

- Our anode rod has a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods
- 66 and 80 gallon models have dual anodes for added protection

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Easy to read temperature display (see back) shows temperature in °F or °C
- Advanced diagnostics convey error messages for service purposes. The last four error messages are saved in the control system memory.

OTHER FEATURES

- Ideal for basements or garage installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning

TEN YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to americanwaterheater.com





COMMERCIAL-GRADE RESIDENTIAL ELECTRIC WATER HEATERS

| Model Number | Nominal Capacity | Rated Storage Volume | UEF | First Hour Rating (Gallons) | Dimensions in Inches | | | | | Approx. Shipping Weight (lbs) | Warranty Term |
|------------------|------------------|----------------------|------|-----------------------------|----------------------|----|--------|-------|--------|-------------------------------|---------------|
| | | | | | A | B | C | D | E | | |
| HPHE10250H045DVN | 50 | 46 | 3.45 | 66 | 63 | 22 | 40-5/8 | 3-3/4 | 40-1/2 | 196 | 10 |
| HPHE10266H045DVN | 66 | 67 | 3.45 | 79 | 61 | 27 | 38 | 4 | 38 | 289 | 10 |
| HPHE10280H045DVN | 80 | 82 | 3.45 | 86 | 69 | 27 | 46 | 4 | 46 | 307 | 10 |

Requires 30 amp breaker.
Top T&P option not available on these models.



ELECTRONIC USER INTERFACE

- User friendly, easy to read display
- LEDs clearly indicate the current operating mode
- Easily select operating mode:
 - Efficiency
 - Hybrid
 - Electric
 - Vacation
- Display communicates current status, mode and set point, and displays error messages when applicable

EFFICIENCY MODE

- Utilizes the heat pump for all water heating
- Automatically reverts to heating element if ambient air or water temperatures are outside optimal operating range for heat pump

HYBRID MODE


- Utilizes the heat pump or heating element, depending on demand

ELECTRIC MODE

- Standard electric water heater operation

VACATION MODE

- One touch operation maintains tank temperature of 60°F (15.6°C) during vacation or extended absence to reduce operating costs and provide freeze protection
- Programmable up to 99 days

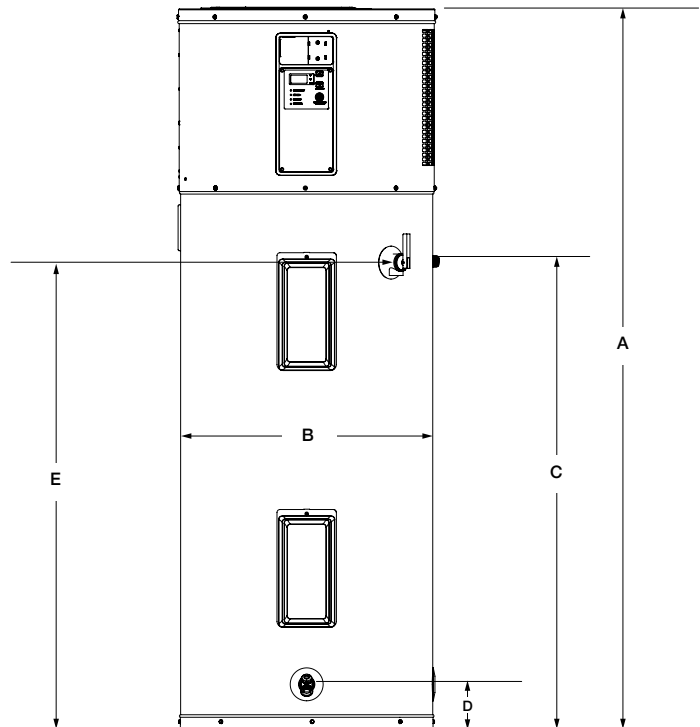

OTHER FEATURES:

- Sacrificial anode to protect against tank corrosion
- Environmentally-friendly non-CFC foam insulation
- Durable, enhanced-flow brass drain valve
- CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS:

- Requires provision for condensate draining; if a suitable drain is not available, a condensate pump is required
- 208/240 VAC 60Hz single phase 30 amp power supply

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.