

PROLINE® ULTRA-LOW NO_x COMMERCIAL-GRADE RESIDENTIAL

INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics.

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high Energy Factor for maximum savings on operating costs.

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NO_x burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NO_x emissions of less than 10 ng/J.

SELF-CLEANING DIP TUBE

- Helps reduce lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition

HEAT TRAP NIPPLES

- Factory-installed for faster installation

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/closer) radius, which not only permits full straight through water flow but also a quick and positive shut off.

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

- Top-mounted T&P relief valve available as option.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to americanwaterheater.com.





COMMERCIAL-GRADE RESIDENTIAL GAS WATER HEATERS

Model Number	Gallon Capacity	First Hour Rating Gallon	Energy Factor	BTU Input Natural Gas	Recovery @ 90° Rise Gallon Per Hour	Dimensions in Inches									Approx. Shipping Weight (lbs)
						A	B	C	D	E	F	G*	H*	Draft Hood	
TALL MODELS															
GU61-30T30	30	55	0.63	33,000	34	61-3/4	58	16	12	8	51-3/4	N/A	N/A	3 to 4 combo	108
GU62-30T30	30	52	0.63	30,000	31	60	56-1/2	17-3/4	11-1/4	8	49-1/4	N/A	N/A	3 to 4 combo	126
GU61-40T40	40	74	0.62	40,000	41	62	58-1/2	17-3/4	11-1/4	8	51-3/4	N/A	N/A	3 to 4 combo	132
GU62-40T40	40	70	0.62	40,000	41	62	58-1/2	19-3/4	11-1/4	8	51-3/4	N/A	N/A	3 to 4 combo	132
GU61-50T40	50	91	0.60	40,000	41	61	57-1/2	19-3/4	11-1/4	8	50-1/2	N/A	N/A	3 to 4 combo	161
GU62-50T40	50	85	0.62	40,000	41	61	57-1/2	22	11-1/4	8	50-1/2	N/A	N/A	3 to 4 combo	161
GU62-50T50*	50	98	0.60	50,000	51	61	57-1/2	22	11-1/4	8	50-1/2	12-1/4	50-1/2	4	177
SHORT MODELS															
GU62-40S40	40	69	0.62	40,000	41	51-1/2	47-3/4	22	12	8	41-1/4	N/A	N/A	3 to 4 combo	138


All models may be ordered from the factory with top T&P valve as an option.

*Side loop connections are standard on model GU62-50T50.

Models with a ring base (GU62-40S40 and GU61-30T30) are certified from sea level to 7,700 ft. elevation.

Models with a leg base (GU61-40T40, GU61-50T40, GU62-30T30, GU62-40T40, GU62-50T40 and GU62-50T50) are certified from sea level to 5,400 ft. elevation.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

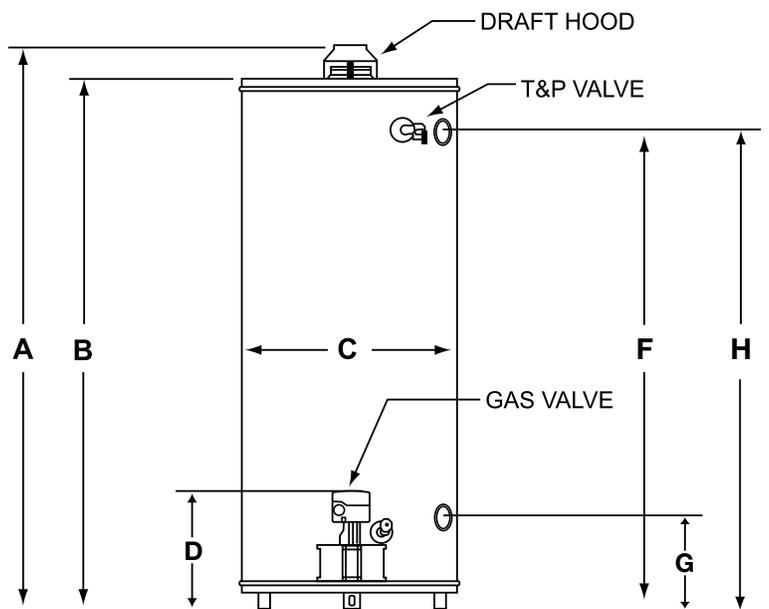

Top View

